

# TEST REPORT

(Electronic version)



No: 200056883

VERIFICATION WEBSITE: [www.gttc.net.cn](http://www.gttc.net.cn)

VERIFICATION CODE: TKS0-0712-24

ISSUE DATE: 2020-04-13

扫码下载报告



APPLICANT: ZHAOQING BOHAN SPORTS CO., LTD  
ADDRESS: NO. 2-1, KANG TAI STREET, HIGH-TEC ZONE, ZHAOQING CITY, GUANGDONG, CHINA

## SAMPLE INFORMATION:

FORTY FOLDING PARTICULATE PROTECTIVE MASKS  
BRAND: KOUMASK  
STYLE NO.: 20200315  
COLOUR: WHITE  
SIZE: KKF-1A  
MANUFACTURE'S NAME: ZHAOQING BOHAN SPORTS CO., LTD

DATE RECEIVED/DATE TEST STARTED: 2020-04-03

## CONCLUSION:

FILTRATION EFFICIENCY TO NaCl PARTICULATE MATTER	M
INSPIRATORY RESISTANCE	M
EXPIRATORY RESISTANCE	M
FLAMMABILITY	M
HEAD BAND	M

NOTE: "M" -MEET THE STANDARD'S REQUIREMENT "F" -FAIL TO MEET THE STANDARD'S REQUIREMENT  
"---" -NO COMMENT

## REMARK:

THIS REPORT IS THE ENGLISH TRANSLATION VERSION OF THE REPORT 200056882.  
ALL THE TESTED ITEMS ARE TESTED UNDER THE STANDARD CONDITION (EXCEPT FOR INDICATION).  
COPIES OF THE REPORT ARE VALID ONLY RE-STAMPED.  
THE EXPERIMENT WAS CARRIED OUT AT No. 1, ZHUJIANG ROAD, PANYU DISTRICT, GUANGZHOU, GUANGDONG, P. R. CHINA.

APPROVED BY:

ZiShan Guo SENIOR ENGINEER

郭子山




PAGE 1 OF 4

TEST REPORT

(Electronic version)

No : 200056883

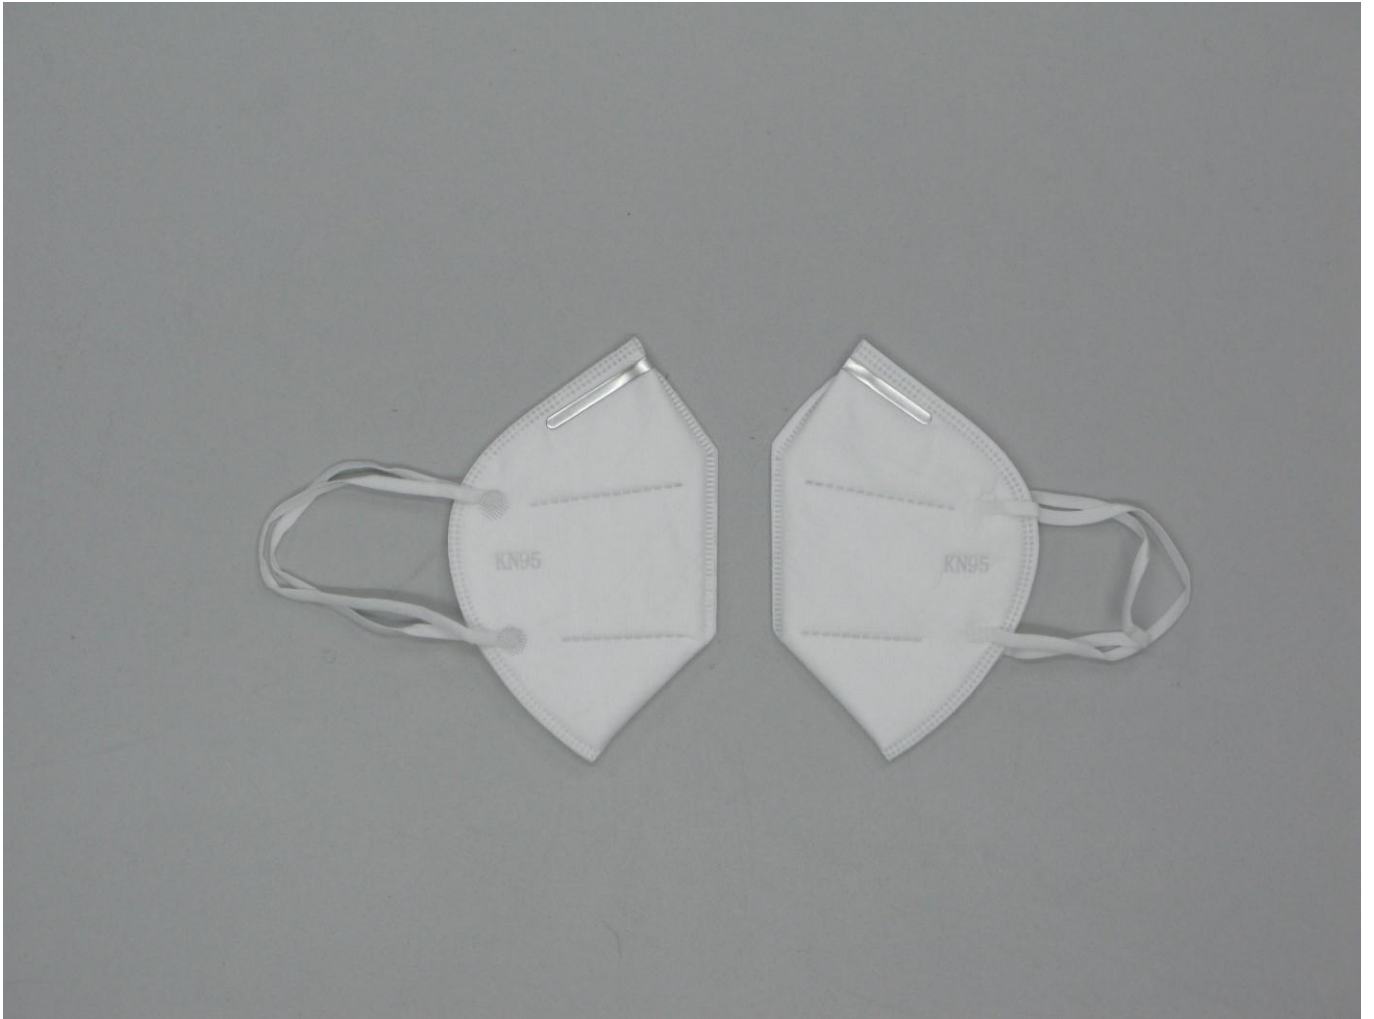

# TEST REPORT

(Electronic version)

No:200056883

## FILTRATION EFFICIENCY TO NaCl PARTICULATE MATTER

(GB 2626-2006 6.3, AIR FLOW:85L/min, AEROSOL:NaCl, AEROSOL CONCENTRATION:15mg/m<sup>3</sup>,  
TEMP:24.3°C, RH:38.1%)

### FILTRATION EFFICIENCY(%) :

#### UNTREATED SAMPLE

1# 99.896  
2# 99.980  
3# 99.982  
4# 99.915  
5# 99.978  
6# 99.960  
7# 99.954  
8# 99.953  
9# 99.947  
10# 99.952

#### CONDITIONING TREATED

1# 99.910  
2# 99.813  
3# 99.947  
4# 99.890  
5# 99.913

### REQUIREMENT

FILTRATION EFFICIENCY(%) :

≥95.0  
(KN95)  
(GB 2626-2006)

## INSPIRATORY RESISTANCE (Pa)

(GB 2626-2006 6.5, HEAD SIZE: MEDIUM)

### UNTREATED SAMPLE:

1# 103.7  
2# 100.2

### PRETREATMENT SAMPLE:

1# 106.0  
2# 104.3

### REQUIREMENT

≤350  
(GB 2626-2006)

## EXPIRATORY RESISTANCE (Pa)

(GB 2626-2006 6.6, HEAD SIZE: MEDIUM)

### UNTREATED SAMPLE:

1# 59.7  
2# 61.5

### PRETREATMENT SAMPLE:

1# 61.1  
2# 58.0

### REQUIREMENT

≤250  
(GB 2626-2006)

## FLAMMABILITY (s)

(GB 2626-2006 6.15)

### AFTERFLAME TIME

#### UNTREATED SAMPLE

1# 0.0  
2# 0.0

#### CONDITIONING TREATED

3# 0.0  
4# 0.0

### REQUIREMENT

AFTERFLAME TIME  
≤5  
(GB 2626-2006)



PAGE 3 OF 4

# TEST REPORT

(Electronic version)

No:200056883

---

## HEAD BAND

(GB 2626-2006 6.11)

UNTREATED SAMPLE:

1# PASS

CONDITIONING TREATED:

1# PASS

## REQUIREMENT

EACH HEAD BAND, BUCKLE AND OTHER ADJUST  
PARTS OF MASK SHOULD NOT SLIP OR BREAK  
UNDER 10N TENSION FOR 10S.  
(GB 2626-2006)

---



—End of Report—

PAGE 4 OF 4